




Client/server computing has become an important industry trend. MAS 200 accounting and business management software incorporates thin client/server technology to add new capabilities. When you choose MAS 200, you'll receive key benefits that only client/server architecture can provide, such as more efficient distributed processing, high performance, enhanced data integrity and reliability, remote access support and scalability for large numbers of users.

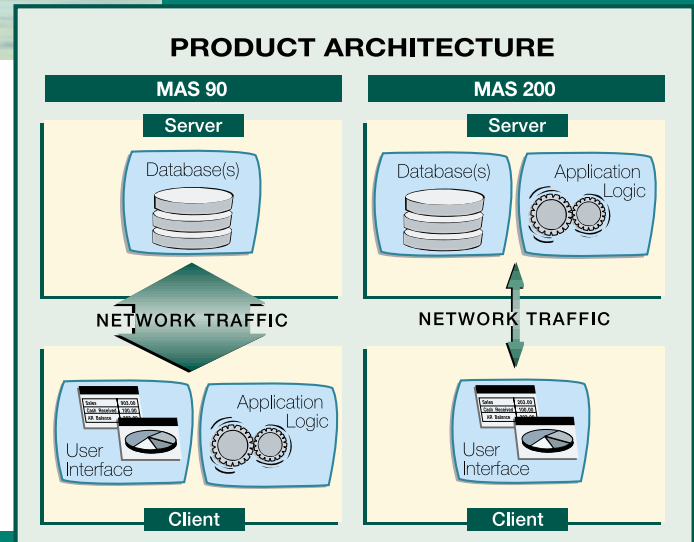

## Minimum Recommended System Configuration for MAS 200 Client/Server

### SYSTEM

Client Workstation	Processor	Memory	Add MB per user
Windows 95/98 <sup>1,2,3,6,7,8</sup>	Pentium 166 MHz or higher	32 MB (64 recommended)	
Windows Me <sup>1,2,3,7,8</sup>	Pentium 300 or higher (400 recommended)	64 MB (128 recommended)	
Windows NT Workstation 4.0 <sup>1,2,3,4,7,8</sup>	Pentium 166 MHz or higher	64 MB	
Windows 2000 Professional <sup>1,2,3,7,8,9</sup>	Pentium II 200 MHz or higher	64 MB (128 recommended)	
<b>SERVER</b>			
Windows NT Server 4.0 <sup>2,3,4,5,7,8</sup>	Pentium 233 MHz or higher (Intel Pentium II or better recommended)	96 MB (5 users) (128 recommended)	4-6 MB per MAS 200 session over initial 5 users
Windows 2000 Server <sup>2,3,5,7,8</sup>	Pentium II 300 MHz or higher (Pentium III recommended)	128 MB (5 users) (192 recommended)	4-6 MB per MAS 200 session over initial 5 users
Windows 2000 Terminal Services/Citrix MetaFrame Server	As required by Terminal Services/Citrix MetaFrame	As required by Terminal Services/Citrix MetaFrame	24 MB per concurrent user

<sup>1</sup> 10 MB or more of local hard drive space required for MAS 200 workstation components

<sup>2</sup> LAN support requires networking hardware; TCP/IP protocol active

<sup>3</sup> Remote dial-in support requires 28.8 Kbps modem(s); 33.6 k or higher recommended; TCP/IP protocol; Windows NT Remote Access Service (RAS)

<sup>4</sup> Service Pack 4 (Service Pack 6A or higher recommended)

<sup>5</sup> 1 GB hard disk or larger

<sup>6</sup> Windows 95/98 must be installed on the local workstation

<sup>7</sup> Requires VGA display adapter capable of 640 x 480 resolution at 256 colors. SVGA running 800 x 600 recommended

<sup>8</sup> Only Intel Pentium class or better processors are supportable with MAS 200

<sup>9</sup> Service Pack 1 or better (Service Pack 2 recommended)

**Note:** These configurations have been thoroughly tested on systems running MAS 200 alone. We cannot guarantee acceptable performance on, or support for lesser configurations. You will require a more powerful configuration if you intend to run MAS 200 plus other server-based applications at the same time, since multitasking could adversely affect your MAS 200 performance. **These requirements are subject to change. Prior to installing MAS 200, please review the most current Supported Platform Matrix. It is also important to view the Hot Pre-Installation Issues. Both can be found on Best Online Support and Services (BOSS) at the Best Software Web site (www.bestsoftware.com).**